


## Organic Response I/O box


### Recessed

1

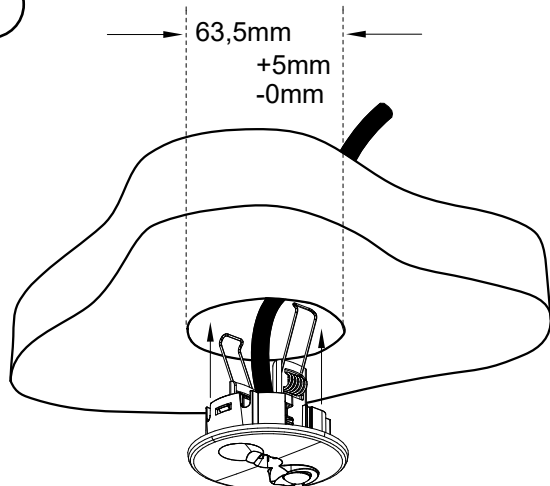


Up to 30mm(max)

2

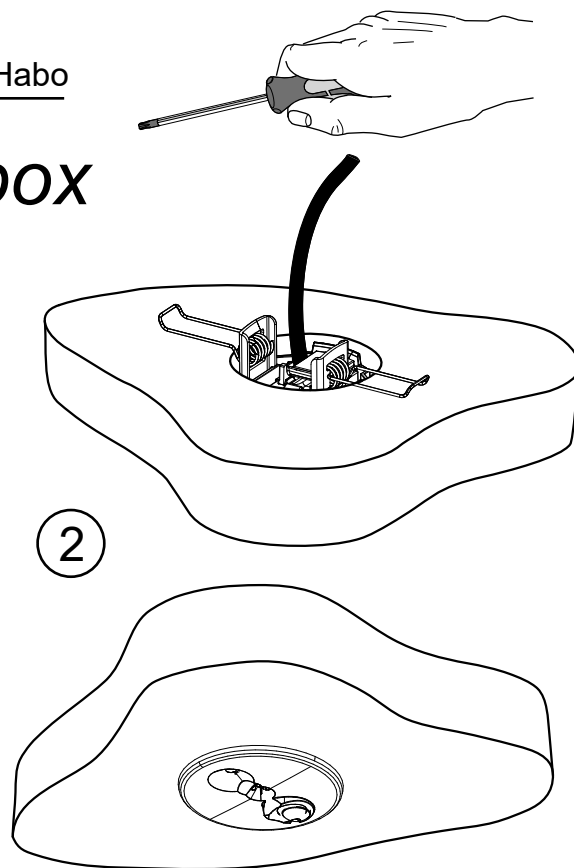


### Surface

1

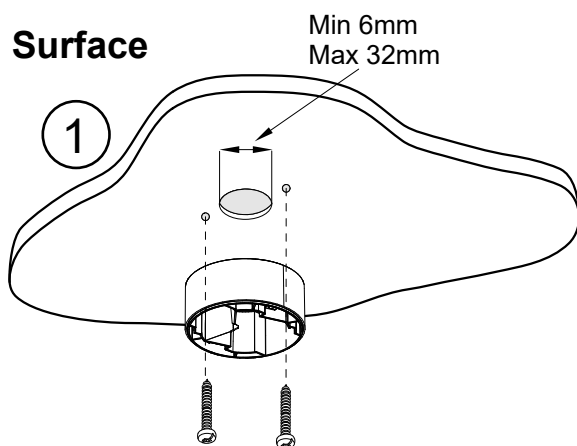

Ø4,8mm Front Mounting


51mm



Ø3,2mm Rear Mounting  
51mm


### ALT.

1

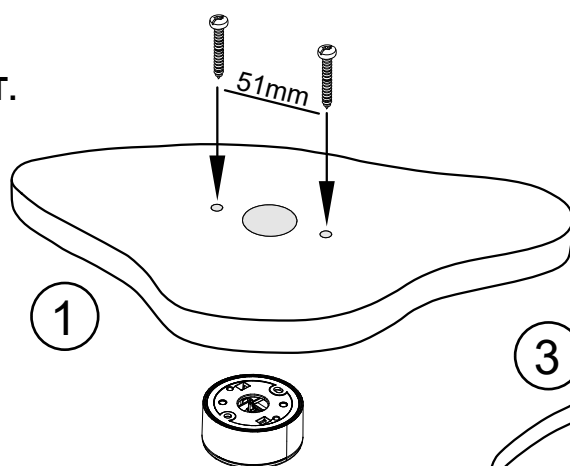


2


3

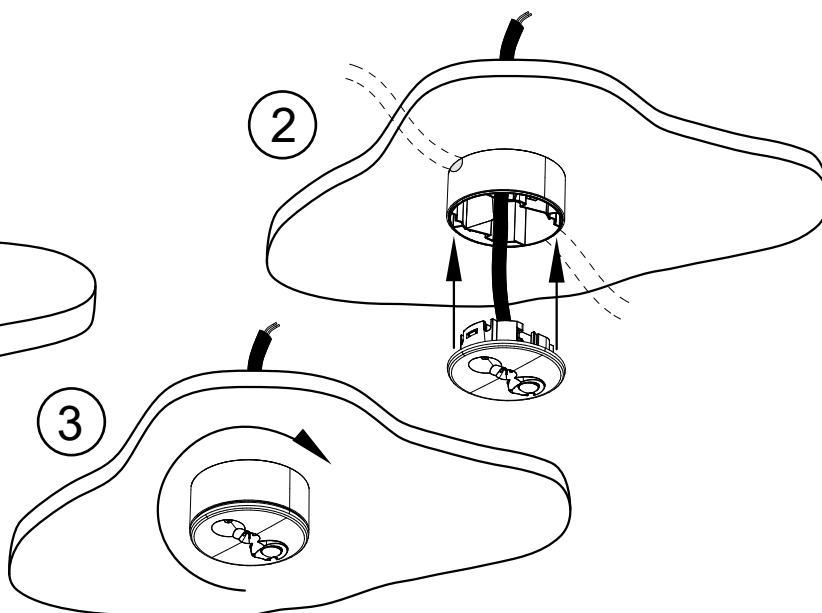

## Suspended

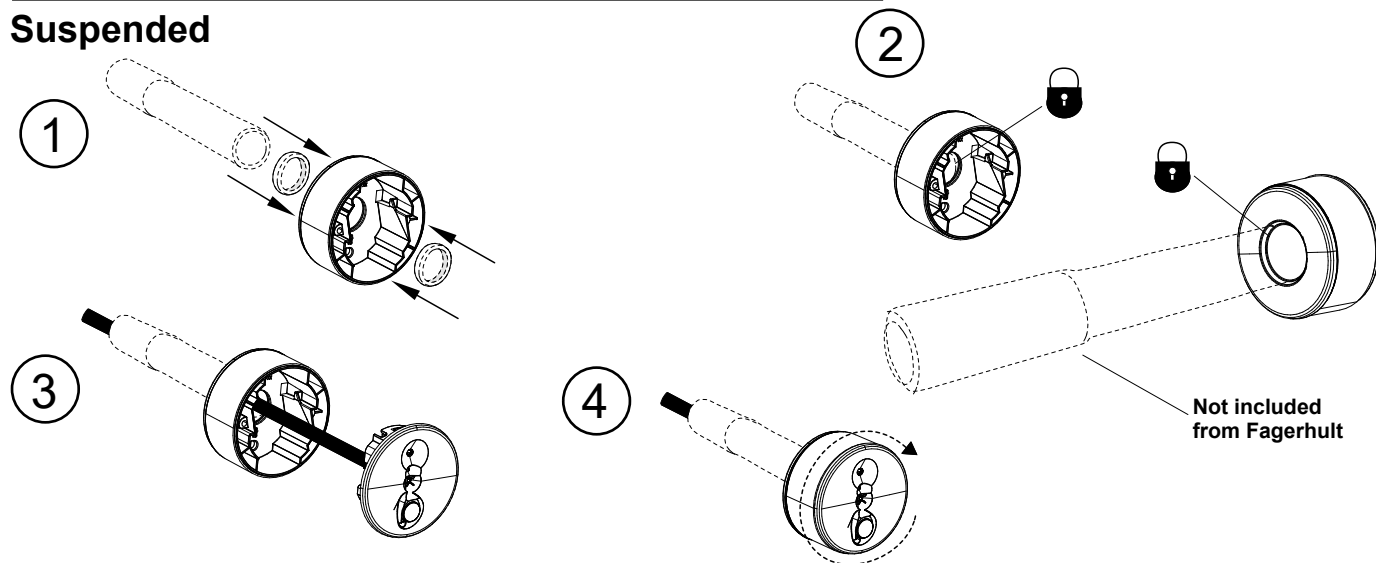


## I/O box

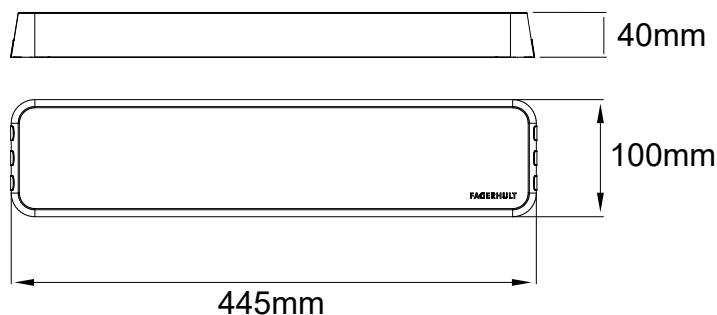

## Surface



## Recessed

## Suspended

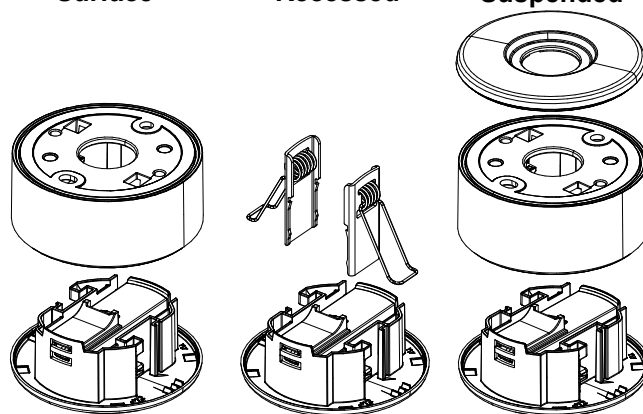


## I/O box

Max 4 drivers connected to 1 I/O box via DALI

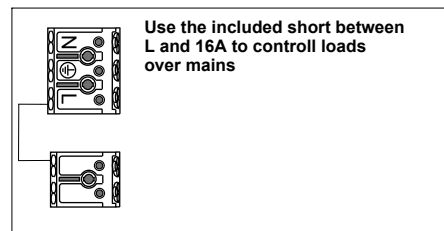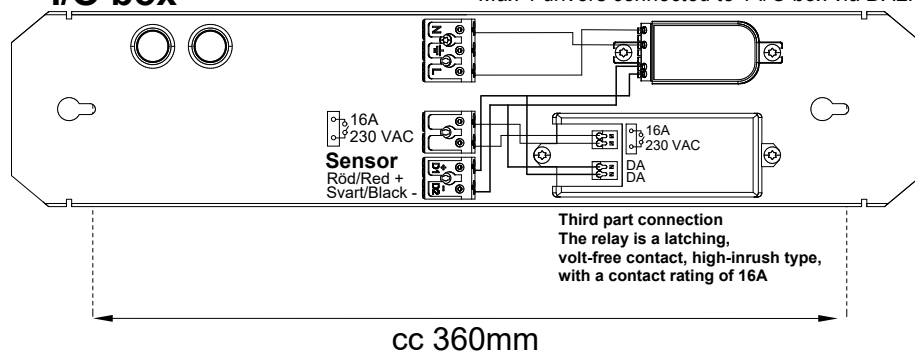

Rekomenderad placering/  
Recommended placement



(S) Grundläggande isolering mellan nät och styr ledning.

(GB) Basic insulation between mains and control wiring.

Operating frequency bands and output power (EIRP):  
Frequency band: 2.4 GHz  
Output power (4dBm max within our operating band)

Härmed försäkrar Fagerhult att dessa typer av radioutrustningar 86413R överensstämmer med direktiv 2014/53/EU.  
Hereby, Fagerhult declares that the radio equipments type 86413R are in compliance with Directive 2014/53/EU and UK SI 2017 No. 1206.

Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: [www.fagerhult.com/declaration-of-conformity](http://www.fagerhult.com/declaration-of-conformity)  
The full text of the EU declaration of conformity is available at the following internet address: [www.fagerhult.com/declaration-of-conformity](http://www.fagerhult.com/declaration-of-conformity)